


## ANT Test Umbilical

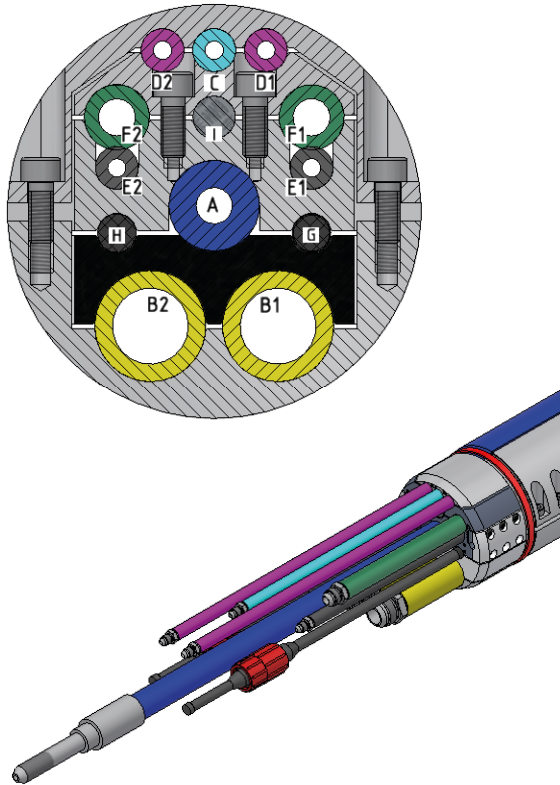

The ANT Test Umbilical is designed for workshop - testing and function tests. The umbilical is ready for packer operations. The velcro jacket allows for replacement of single hoses and cables.

### GENERAL INFORMATION

Length	35 m
Min. bending radius	350 mm
Diameter	140 mm
Weight	approx. 9,5 kg/m
Max. water depth	30 m
Weight load limit	820 kg (Safety factor based on min. breaking force: 4,0)
EU Directives	Pressure Equipment Directive 2014/68/EU (acc. to article 4 paragraph 3)
Lifetime	5 years
Storage temperatures	-10 to +55 °C
Operating temperatures	0 to +45°C
Remark	Return line for packer operation included.

### COMPONENTS

Hydraulic supply lines	5x hydraulic hoses DN6
	2x hydraulic hoses DN12
	2x pneumatic hose DN25
HP Suspension supply line	1x HP hoses
Cable	1x Rotary Encoder Cables
	1x 3S Cables
Steel wire rope	1x steel wire rope $\varnothing$ 14 mm, stainless steel

### FEATURES

Useable as lifting device for DCH1 MK2, DCH2 MK2, PCH MK2, DCH3 MK3.

Flexible velcro layer as outer jacket allows for replacement of single hoses or cables.