


## 3-Axis Cutting Table

Device for remote controlled handling of a cutting nozzle by WAS cutting, suitable for cutting of three-dimensional outlines.

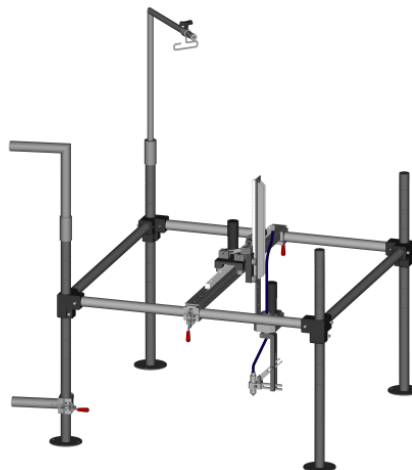

## 3-Axis Cutting Table

Working area	1000 mm (39.37 inch) horizontal, 500 mm (19.6 inch) vertical, max. Ø 250 mm (9.84 inch) rotation
Drive	hydraulic
Material	aluminium and stainless steel predominately
Traverse speed	20-200 mm/min (0.79-7.87 inch/min)
Weight	70 kg (154.32 lb)
Size (L x W x H)	1450 mm x 1050 mm x 1100 mm (57.09 x 41.34 x 43.31 inch)
Electric power supply	0,25 kW, 230 V / 50 Hz
Hydraulic fluid	mineral oil
Flow	max. 1 l (0.26 US gallon)/min, max. 80 bar (1160 PSI)
Weight of hydraulic unit	58 kg (127.87 lb) full
Size (L x W x H) of hydraulic unit	700 mm x 440 mm x 560 mm (27.56 x 17.32 x 22.05 inch) in a stainless steel frame
Controls	axis selection, direction selection, speed control
Weight of control panel	2 kg (4.41 lb)

## Generator

Electric power	2.7 kW, 230 V / 50 Hz
Drive	gasoline
Weight	58 kg (127.87 lb)
Size (L x W x H)	536 mm x 400 mm x 458 mm (21.1 x 15.75 x 18.03 inch) in steel frame

## Accessories

Energy cable	20 m (65.62 ft) / 0.6 kg(1.32 lb)/m
Control cable	max. 500 m (1640.42 ft) / 0.4 kg (0.88 lb)/m
Hydraulic hose pack	15 m (49.21 ft) / 0.2 kg (0.44 lb)/m

ANT Applied New Technologies AG  
 Hinter den Kirschkatzen 32  
 23560 Lübeck  
 Germany

Tel. +49 (0)451-5 83 80 - 0  
 Fax +49 (0)451-5 83 80 - 99  
 E-Mail: info@ant-ag.com  
 http://www.ant-ag.com



## 2-Axis Cutting Table

Device for remote controlled handling of a cutting nozzle by WAS cutting, suitable for cutting of two-dimensional outlines.



EOD / IEDD

## 2-Axis Cutting Table

Working area	250 x 200 mm (9.84 x 7.87 inch)
Controls	axis selection, direction selection, speed control
Material	aluminium and stainless steel
Traverse speed	0-750 mm (0-29.53 inch)/min
Weight	12 kg (26.46 lb)
Size (L x W x H)	620 mm x 510 mm x 690 mm (24.41 x 20.08 x 27.17 inch)
Drive	brushless DC motor
Size (L x W x H) transportation and storage case	825 x 520 x 290 mm (32.48 x 20.47 x 11.42 inch)

## Control panel

Electric power	24 V, 3300 mAh, 2 battery packs
Cable length	15 m (49.21 ft) other lengths on request, up to 200 m (656.17 ft)
Weight	5 kg (11.02 lb)
Size (L x W x H) transportation and storage case	340 x 295 x 150 mm (13.39 x 11.61 x 5.91 inch)